

R2646

ELECTRIC SCISSOR LIFT

SCISSOR LIFT



KEY SPECS

Platform Height
26-ft / 7.92-m

Platform Capacity
1,200-lb / 545-kg

Number of Occupants
Indoor: 2
Outdoor: 1

Stowed Drive Speed
3 mph / 4.8 km/h

KEY FEATURES

- The 1,200-lb indoor and outdoor platform capacity beats the competition.
- Active pothole protection provides increased ground clearance to tackle demanding terrain.
- Built rugged for rentals, allows professionals to meet the demands of any job site.
- Complies with A92.20 ANSI regulations, achieving the highest standards.

ACCESSORIES & OPTIONS

- 4 x 6V AGM Batteries, 220 ah
- 4 x 6V Batteries, 255 ah
- 900W Inverter
- Anti-Vandalism Package
- Ambient Noise Alarm
- Coiled Platform Control Box Cable
- Drive Motor Covers
- Extension Deployment Handles
- Fire Extinguisher
- MDI (Ground)
- Pipe Racks
- SkySense® Enhanced Detection System
- USB Charger & Phone Holder
- Workstation
- White Noise Alarm

STANDARD SPECIFICATIONS

| Performance | Indoor | Outdoor |
|---|----------------------------------|----------------------------------|
| Platform Height (Elevated) | 26-ft / 7.92-m | 26-ft / 7.92-m |
| Platform Capacity | 1,200-lb / 545-kg | 1,200-lb / 545-kg |
| Capacity on Platform Extension | 265-lb / 120-kg | |
| Number of Occupants | 2 | 1 |
| Lift / Lower Time (No Load) | 47/44 seconds | 47/44 seconds |
| Lift / Lower Time (Rated Load) | 54/37 seconds | 54/37 seconds |
| Maximum Drive Height | Fully Elevated | Fully Elevated |
| Weight* | 5,267-lb / 2,389-kg | 5,267-lb / 2,389-kg |
| Max. Ground Bearing Pressure | 122 psi / 8.6 kg/cm ² | 122 psi / 8.6 kg/cm ² |
| Drive Speed (Lowered) | 3 mph / 4.8 km/h | 3 mph / 4.8 km/h |
| Drive Speed (Raised) | 0.5 mph / 0.8 km/h | 0.5 mph / 0.8 km/h |
| Gradeability | 25% | 25% |
| Max Tilt Rating - Side-to-Side (Indoor) | 2.5 Degrees | 1.5 Degrees |
| Max Tilt Rating (Fore and Aft) | 3.5 Degrees | 3.5 Degrees |
| Turning Radius (Inside) | Zero | Zero |
| Turning Radius (Outside) | 88-in / 2.24-m | 88-in / 2.24-m |

*Certain options or country standards increase weight

Power Source

| | |
|---------|-----------------------|
| Battery | 4 x 6V 220 amp-hr |
| Charger | 27 amp |
| Drive | Hydraulic Front-Wheel |

Tires

| | |
|----------|--------------------------|
| Standard | 16 x 5-in / 406 x 127-mm |
|----------|--------------------------|

Brakes

Multi-Disc Friction

Hydraulic System

| | |
|----------|-------------------------|
| Capacity | 4 gal / 15 L |
| Pump | Fixed Displacement Gear |

STANDARD FEATURES

- 27 amp Multi-Function Universal Charger
- AC Receptacle in Platform
- Active Pothole Protection System
- All Motion Alarm
- Analyzer Port for Diagnostics
- Battery Condition Indicator
- ClearSky Smart Fleet™ Hardware (CS550)**
- Diamond Tread Steel Deck
- Dynamic Braking
- Fork Lift Pockets
- Foot-Actuated Deck Extension
- Greaseless Kingpin Joints
- Horn
- Hourmeter
- Lanyard Attach Points
- LED Motion/Amber Beacon (CS550)**
- Lifting and Tie Down Points
- Lubrication Free Scissor Arm Bushings
- Manual Descent Cable
- Movable, Removable Platform Control
- Nickel Plated Pins
- Proportional Controls
- Removable Ladder
- Scissor Maintenance Prop
- Steel Swing-Out Doors
- Tilt Alarm and Light
- Variable Tilt Visual Zone Indicator

**Standard beacon and ClearSky Smart Fleet hardware availability varies by model throughout 2023.

R2646


ELECTRIC SCISSOR LIFT

SCISSOR LIFT



DIMENSIONS

All dimensions are approximate

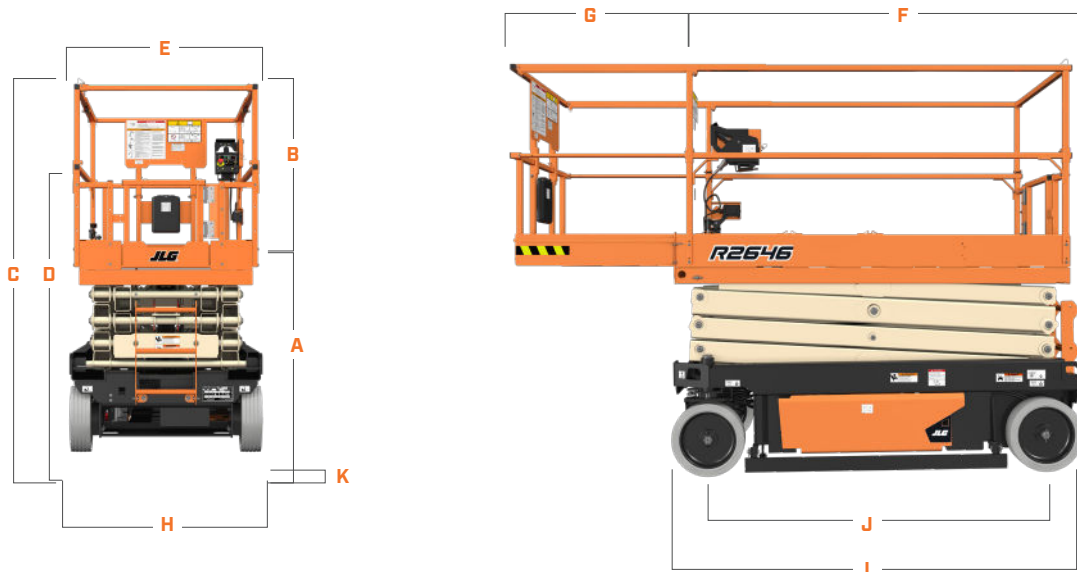

- A.** Platform Height (Lowered) 45-in / 1.14-m
- B.** Platform Railing Height 44.6-in / 1.1-m
- C.** Machine Height (Rails Raised) 89.6-in / 2.28-m
- D.** Machine Height (Rails Lowered) 71.7-in / 1.82-m
- E.** Platform Width 41.6-in / 1.1-m
- F.** Platform Length 84-in / 2.1-m

- G.** Platform Extension 36-in / 91-cm
- H.** Machine Width 46-in / 117-cm
- I.** Machine Length 94.3-in / 2.4-m
- J.** Wheelbase 74-in / 1.9-m
- K.** Ground Clearance 3.9-in / 9.8-cm



We provide coverage for one (1) full year, and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/or equipment changes without prior notification. This machine meets or exceeds applicable ANSI and CSA requirements based on machine configuration as originally manufactured for intended applications. Please reference the serial number plate on the machine for additional information.



JLG INDUSTRIES, INC.
Toll-free US 877-JLG-LIFT
JLG.com

An Oshkosh Corporation Company