

FEATURES

- 40' (12.3m) Outreach
- Continuous Rotation Turret
- GMG 4wd with Traction Control
- 550 lbs (250 kg) Platform Capacity
- 8' x 3' (2.44m x .91m) Platform
- 180° Platform Rotation
- Fully Proportional Drive/Lift
- Foam Filled Tires
- Oscillating Axle
- Self-closing Entry Gate
- On-board Diagnostic System
- Load Sensing System
- Auto-leveling System
- Swing-out Engine Tray



SPECIFICATIONS

64/40 AJ


Measurements	US	Metric
Working height maximum	70' 2"	21.38 m
Platform height maximum	63' 7"	19.38 m
Horizontal outreach	40' 4"	12.3 m
Up and over height	27' 1"	8.25 m
Stowed length	28' 11"	8.82 m
Stowed width	8' 1"	2.46 m
Stowed height	8' 4"	2.52 m
Platform length	8'	2.44 m
Platform width	3'	0.91 m
Jib length	5'	1.53 m
Wheelbase	8' 3"	2.52 m
Ground clearance	1' 5"	0.42 m
Productivity	US	Metric
Platform capacity	550 lbs	250 kg
Drive speed	4.0 mph	6.2 km/h
Gradeability	45%	
Axles oscillation	8"	20 cm
Turning radius (inside)	8' 3"	2.5 m
Turning radius (outside)	18'	5.48 m
Turntable swing	continuous	
Platform rotation	180°	
Tail swing	16"	0.4 m
Maximum slope	5°	
Max. wind speed	28 mph	12.5 m/s
Power	US	Metric
Diesel engine	Kubota V2403	
Engine power	49 hp	36 kW
Fuel tank	40 gal	150 L
Voltage	12V dc	
Drive	4wd	
Hydraulic tank capacity	40 gal	150 L
Tire / Weight	US	Metric
Tire	33x12 Foam Filled	
ANSI / CE	22,050 lbs	10000 kg

STANDARD EQUIPMENT

- Flashing beacon
- Emergency descent alarm
- Horn
- All motion alarm

OPTIONS

- Generator 3.5kW
- Generator, welder ready
- Anti-crush system
- Hostile environment kit
- Control box flip cover
- Platform work lights
- Non-marking tires
- Cold climate hydraulic oil
- Cold climate engine heater
- Cold climate battery
- Power to platform

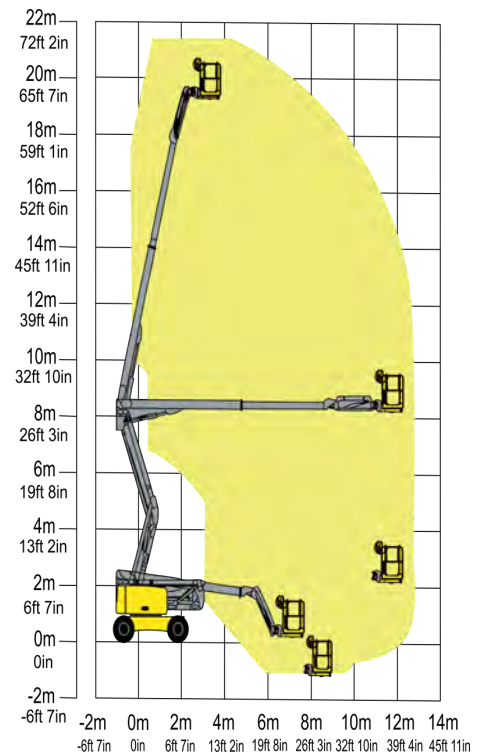

www.goGMG.com